

oxygenics®

Elite™ SkinCare™



PATENTED TECHNOLOGY

Oxygenics showerheads are the only high-caliber fixtures on the market with the complete package - a powerful self-pressurizing sensational shower spray, a reduced water and energy bill, and a sleek durable design.

SUSTAINABILITY

Oxygenics technology saves thousands of gallons of water per fixture per year in demanding commercial and residential environments. Conserving water and natural resources is one way to move towards sustainability. Using a water-conserving showerhead not only saves water, but it also saves energy.

High Performance Meets Style


Sleek, modern, eco-friendly and pressure boosting. The Oxygenics Elite SkinCare shower is the whole package. Designed to save up to 70% of the water and energy used by traditional shower fixtures, it ensures a superior and refreshing shower experience every time. The moment you turn on the water you'll realize this is like no other showerhead you've ever experienced.

Pressure Boosting Technology

Increases Your Pressure - Saves Water & Energy

There is no other showerhead brand on the market that uses the patented core technology of Oxygenics showerheads and no other showerheads are able to deliver the same powerful pressurized results.

The innovative design injects air into the water stream as the accelerator fin increases the velocity of the outbound water. The result is a powerful full-body oxygenated spray that feels amazing and saves water and money at the same time.

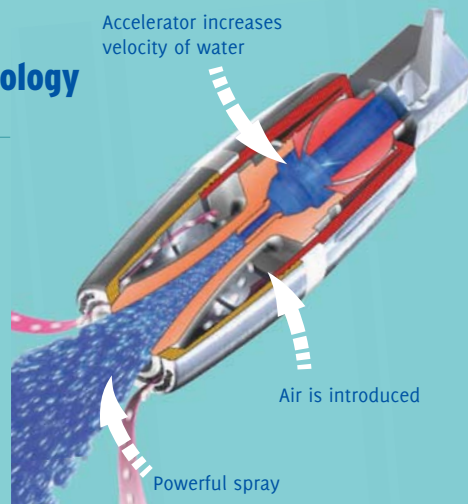

FEATURES

Water Saving



Money Saving



Easy Install



Lifetime Warranty



Flow Control



AVAILABLE FLOW RATES

2.5 GPM MAX

2.0 GPM MAX

AVAILABLE STYLES

Fixed



AVAILABLE FINISHES

Chrome



Brushed Nickel



Super charge your shower at www.oxygenics.com. Call 1.800.344.3242 or 209.529.3546.

Email sales@oxygenics.com for more.

oxygenics® Elite™ SkinCare™

FIXED W/ FLOW CONTROL

MODEL	FINISH	MAX FLOW RATE
700-xf20	Chrome	2.0
700-xf25	Chrome	2.5
71020	Brushed Nickel	2.0
710-xf25	Brushed Nickel	2.5

Includes: Teflon Tape, Installation Instructions

FEATURES & BENEFITS

Increased Water Pressure

Increased water velocity + air induction = MORE PRESSURE. The patented technology ensures an invigorating pressurized shower spray regardless of water pressure.

Go 'Green' with Oxygenics

Oxygenics uses 20-70% less water compared to industry leading brands. Thousands of gallons of water can be saved each year which means significant energy and money savings.

Adjustable Spray Volume

The flow control valve reduces water flow to further increase water savings. Adjusts from a full spray down to a trickle for an infinite amount of spray possibilities!

No Clogging – Zero Maintenance

The internal components are made of Delrin® - a material similar to Teflon® which increases durability and eliminates clogging, mineral build-up and corrosion. No cleaning required - install it and forget it!

Guaranteed For Life

The Oxygenics Elite SkinCare comes with a lifetime performance warranty against clogging. It's guaranteed not to clog – EVER.

The Oxygenics Elite SkinCare Series meets ANSI standard testing and materials specifications A112.18.1M-1996.

Designed to function appropriately at pressures no less than 20 psi. Constructed to withstand pressures of 150 psi and temperatures up to 160° F.

The flow device is of a single orifice design. The internal components are constructed of injection molded Delrin acetal. The pieces are machine pressed into the base and cannot be removed with a straight pushing or pulling force of less than 100 lbs.

Equipped with a comfort control lever. The lever assembly glides on "o" rings made from molded rubber. As a safety feature, when the comfort controls is turned to the lowest position, water will continue to flow.


The nozzle uses a venturi system consisting of 16 air entrance ports, which allow air to increase the spray velocity. Oxygen levels in the water are increased as well.

The fixed base utilizes a ball and socket allowing for adjustment. Ball is constructed with Delrin acetal. The seating washer is designed to seal around the ball swivel when compressed by assembly. The base connector is made from free machining aluminum and CBA alloy. Bases fit any standard 1/2" male threaded shower arm.

Outer covering of the spray nozzle is constructed of ABS plastic, enhancing the showerhead's appearance and muffling the venturi system.

Lifetime warranted against clogging and defective material and workmanship.

WATER SAVINGS COMPARISON

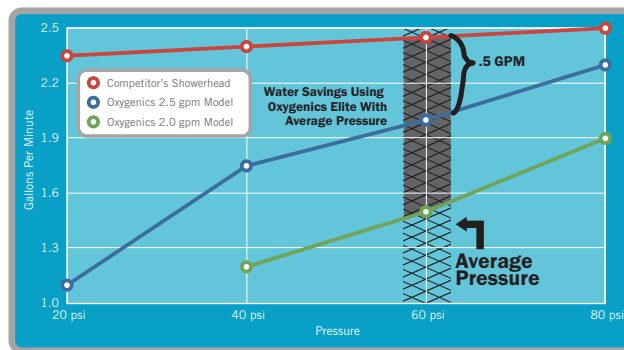

Flow restrictors have been placed in showerheads by manufacturers as a way to keep water usage at 2.5 GPM since it was mandated by the U.S. Government in 1992. This method of water restriction significantly decreases water pressure creating unsatisfactory shower performance. Oxygenics showerheads contain no removable restrictors and adapt to the incoming water pressure to use only what is necessary while still providing an extremely enjoyable and pressurized shower which saves a significant amount of water, energy and money.

While other industry-standard showerheads flow at 2.5 GPM at 60 PSI (national water pressure average), the Oxygenics Elite SkinCare flows at 2.0 GPM at 60 PSI, offering 20% water savings. Not only is this savings significant in reducing water, but it also reduces energy costs as less hot water is used.

As illustrated in the chart above, Oxygenics showerheads adapt to the incoming water pressure, so as the pressure decreases, more water and energy savings can be expected compared to industry-standard showerheads that have a constant flow of 2.5 GPM. In some cases, as much as 70% water and energy can be saved by using Oxygenics showerheads. Save even more water and energy with the 2.0 GPM model.

PRODUCT SPECS

Product dimensions:

Fixed - 2" x 2" x 5.125"

Individual product weight:

Fixed - .65 lbs.

PACKAGING SPECS

Package dimensions:

White Box - 2.5" x 2.5" x 5.5"
Clamshell - 7.5" x 6.5" x 4"

Case quantity (24 units):

White Box - 24 units / ctn.
Clamshell - 6 units / ctn.

Case weight (16 lbs. / 28 lbs.):

White Box - 16 lbs. / ctn.
Clamshell - 4 lbs. (7 lbs. / ctn.)

